

30" BUILT-IN FREEZER

STAINLESS STEEL EXTERIOR BUILT-IN FREEZER



CODE ID
F7SFC30S1-R (RIGHT HINGE)

CODE ID
F7SFC30S1-L (LEFT HINGE)

-  RIGHT HINGE
-  LEFT HINGE

-  Deep-freezing
-  Total No Frost
-  LED lighting
-  Integrated Installation
-  Holiday Mode
-  Ice Maker
-  Sabbath Mode

Features


Our column freezers are both powerful, elegant and provide commercial grade performance. With an elegant 304 stainless clad door and matching pro handle, these columns match perfectly with our Fulgor Milano pro cooking products and feature a brilliant white aluminum interior with metal bins on full extension stainless glides. All units feature an accessory ice maker, with food preservation being the priority. Combining elegant design and commercial quality, ensures optimal food preservation performance. A dedicated compressor and evaporator provide consistent and precise temperatures throughout.

SPECIFICATIONS

- Stainless Steel Exterior
- Total No Frost
- Height adjustable glass shelves
- Metal freezer bins on stainless steel glides
- Icemaker with ice tray
- Luminous white interior
- Multilevel LED lighting
- Professional handle kit included

REFRIGERATION

BUILT-IN FREEZER COLUMN

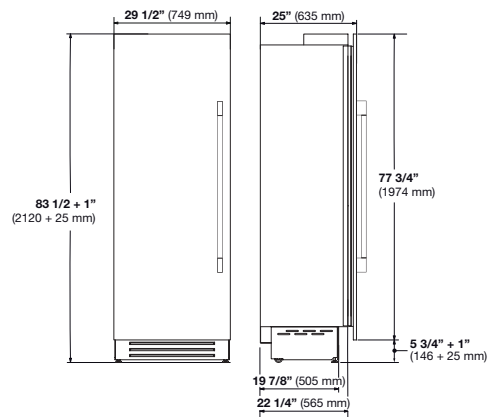


CODE ID		30" BUILT-IN FREEZER F7SFC30S1-L (LEFT HINGE) F7SFC30S1-R (RIGHT HINGE)	
Finish	Stainless Steel Exterior		
PERFORMANCES/CAPACITY			
Annual Energy Usage	548 kWh/yr		
Interior capacity (cbft)	12.67		
FEATURES			
Professional handle kit	•		
Shelves	2		
Adjustable Door Shelves	2		
Freezer Drawers	3		
LED lighting	•		
Ice Maker	•		
Ice Maker production capacity	2.2 lbs / 24 hrs		
No Frost	•		
DIMENSIONS/WEIGHT			
Width in	30"	762	mm
Height in	83 - 1/2"	2120	mm
Depth without handle in	25"	635	mm
Minimum niche height in	84 - 1/2"	2145	mm
Door clearance in	52"	1320	mm
Door opening angle	100°		
Net Weight	368 lbs	167	kg
POWER / RATINGS (115 V, 60 HZ)			
Watts / Amps	327W - 3A		
Power Cable	Nema 5-15P		
INSTRUCTIONS FOR USE			
Use & Care Manual / Installation Manual	English / French / Spanish		


BUILT-IN FREEZER 30"

NICHE SPECIFICATIONS AND DIMENSIONS


NA STANDARD CUTOUT

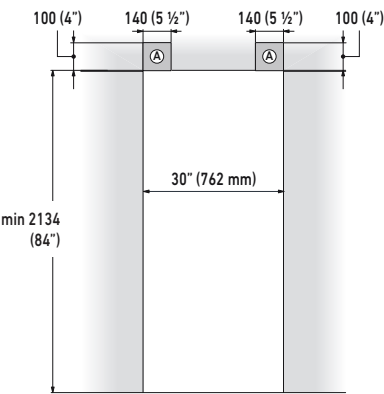

EUROPEAN STANDARD CUTOUT

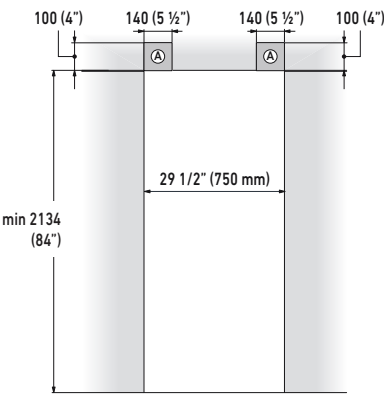

DOOR SWING CLEARANCE

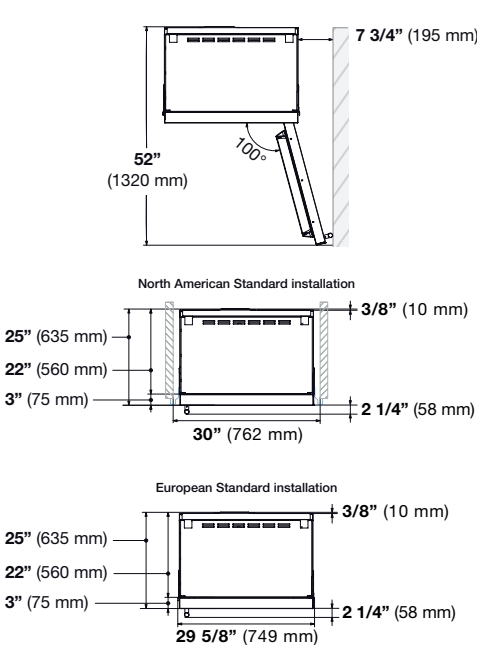


! When installing our top compressor models in a standard NA cut out it is recommended to use the J-profile trim kit to close the lateral gap of the appliance, alternatively use the standard plastic mounting clips when installing unit into Euro width cabinet. Installing in the unit in a standard North American "cutout" without the J-profile trim kit, will result in a larger gap along the cabinet opening.

! When installing our top compressor models in a new construction, it is recommended to use the European "cutout" dimensions to achieve a minimal gap on the lateral sides and avoid the need to use the J-profile trim kit. Installing in the unit in a standard North American "cutout" without the J-profile trim kit, will result in a larger gap along the cabinet opening.

TECHNICAL DATA

(A) Niche Width	see above
(B) Unit Width	29 1/2" (749 mm)
(C) Unit Width with lateral frames	30" (762 mm)



! If the units are to be installed inside a cutout or within an enclosed structure, it is necessary to design a ventilation shaft at the back of the cutout to assure proper ventilation at the back of the unit. Cross-sectional chimney ventilation area should equal 200cm² (31in²).

ELECTRICAL AND WATER CONNECTIONS

